

Tumble Dryer

Model:TD6-6



Instrument Characteristics:

- ◆ Reversible door hanging for a convenient laundry flow
 - ◆ Easy access to vital parts from the top and rear for simple servicing
 - ◆ Stainless steel drum
 - ◆ Residual Moisture Control for an accurate drying result and a low energy consumption
 - ◆ Reversing drum minimizes wrinkles and drying time to get an effective and even drying performance
- (For optimal performance the room temperature should not exceed 25°C for the condensed version)


Other options:

- Stainless steel front
- Stainless steel base frame
- Connectable to booking-/payment system or coin meter
- Stacking frame for mounting TD6-6 on top of WH6-6
- Integrated condense system

Technical Parameter:

Main specifications		TD6-6		Condense
Rated capacity, filling factor 1:22	kg/lb	6/13		6/13
Drum, volume	litre	130		130
Drum, diameter	ø mm	575		575
Heating alternatives:				
El	kW	3.2/1.5		3.0
Consumption data ¹		El 3.2kW	El 5.1kW	El 3.0kW
Total time	Min	62	41	63
Energy consumption, full load	kWh	3.05	3.02	3.3
Evaporation	g/min	48	73	47
Energy water evaporation	kWh/l	1.03	1.02	1.11

1.At rated capacity 1:22, 100% cotton load at 50% initial moisture dried to 0%.

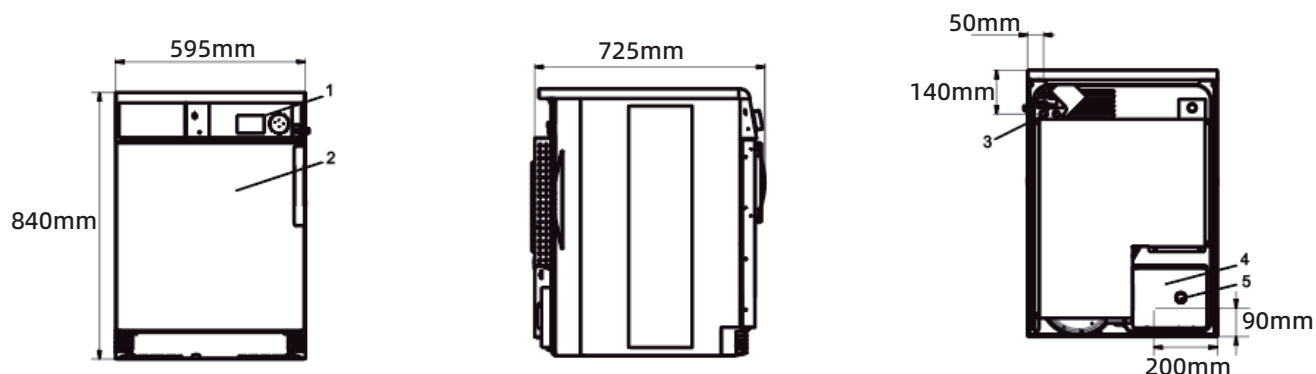

Electrical connections					
Heating alternative	Main voltage	Hz	Heating power (kW)	Total power (kW)	Recommended fuse (A)
Electric heating	220-240V 1~	50/60	3.2	3.5	16
	220-240V 3~	50/60	3.2/5.1	3.5/5.4	13/16
	380-415V 3~	50/60	5.1	5.4	10
	440-480V 3~	60	5.1	5.4	10
Condense	220-240V 1~	50/60	3.0	3.3	16
	220-240V 3~	50/60	3.0	3.3	13
	380-415V 3~	50/60	3.0	3.3	10
	440-480V 3~	60	3.0	3.3	10

Connections		TD6-6	Condense
Air outlet	ø mm	100	-
Maximum air flow	m ³ /h	240	-
Condensate		-	1/2"
Maximum static back pressure	Pa	80	-
Sound levels			
Sound power/pressure level at drying ¹	dB(A)	67/53	67/53
Heat emission			
% of installed power, max		15	15
Shipping data ²			
Weight	kg	58	57
Shipping volume	m ³	0.51	0.63
1. Operating panel 2. Door opening, ø 370mm 3. Electrical connection 4. Exhaust connection 5. Condense connection			

1. Sound power levels measured according to ISO 60704.

2. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.