



Dryer Installation Manual

Installation Guide 安裝說明

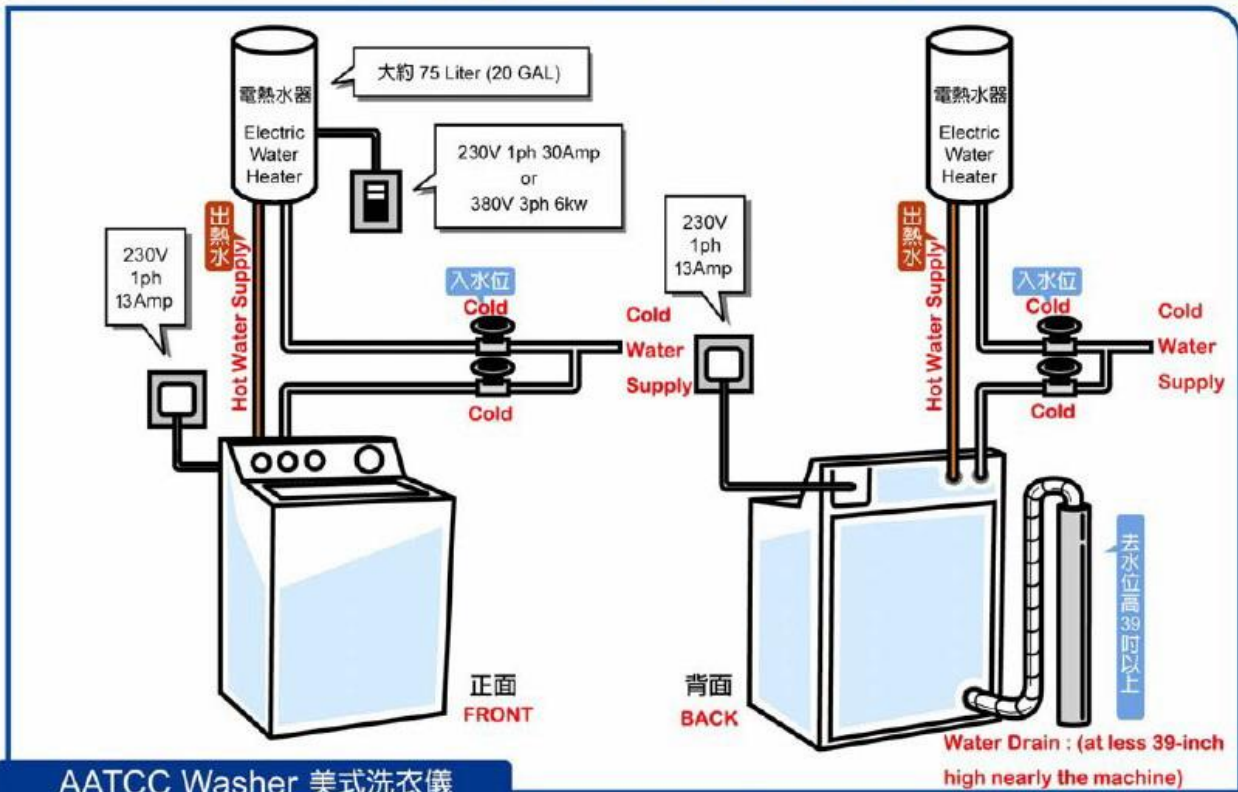

AATCC Washer 美式洗衣儀

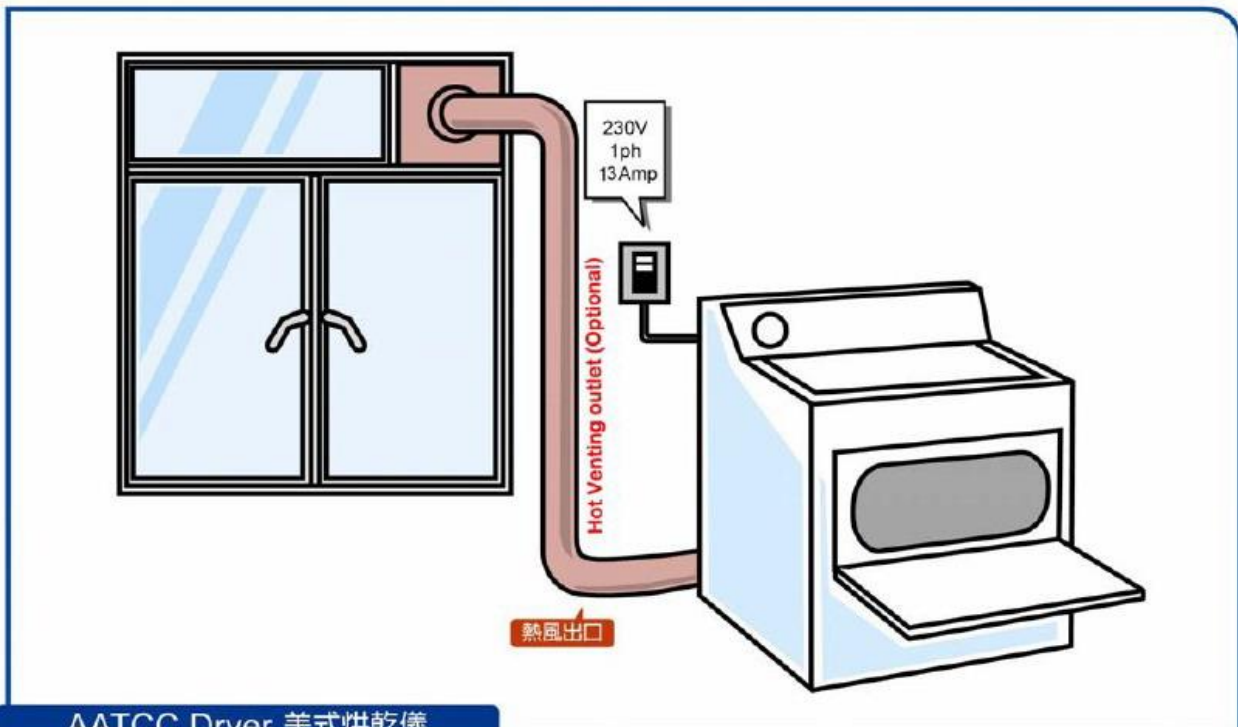

AATCC Dryer 美式烘乾儀

*詳細安裝方法請參閱說明書

Catalog

Installation Environment -----	3
Installation Steps -----	4
Installation Materials -----	5
Installation Tools -----	6

P3

Installation Environment

1. The dryer is suitable for indoor work to avoid sunlight and rain
2. The ground should be flat so that the dryer operates smoothly without shaking.
3. The power of the dryer is relatively high, about 6000W, which is not suitable for sockets. A 40A leakage switch should be installed, and the power cord of the dryer should be connected to the leakage switch (as shown in Figure 1)



P4

Installation Steps

1. Place the dryer steadily on the ground, open the drum door, take out the foot mat from the drum, install the foot mat, adjust the height to be consistent, and keep it stable.
2. Fix the exhaust duct with a clamp to the exhaust outlet of the dryer, and the other end should be placed outdoors to avoid affecting the indoor temperature and working environment when discharging hot air. (As shown in the figure below).
3. Connect the power supply and the installation is complete.



P5

Installation Materials

1. A 100mm diameter clamp is used to connect the exhaust duct to the dryer exhaust outlet.
2. A hose with a diameter of 100mm, and the length depends on the environmental requirements.



P6

Installation Tools

1. Cross screwdriver for connecting power cord and locking clip.
2. Wire cutting pliers for cutting wires.
3. Stripping pliers for insulating rubber used for exploiting power lines.
4. Adjustable wrench for adjusting the height of the foot mat of the dryer.

