



Washing Machine Installation Manual

Installation Guide 安裝說明

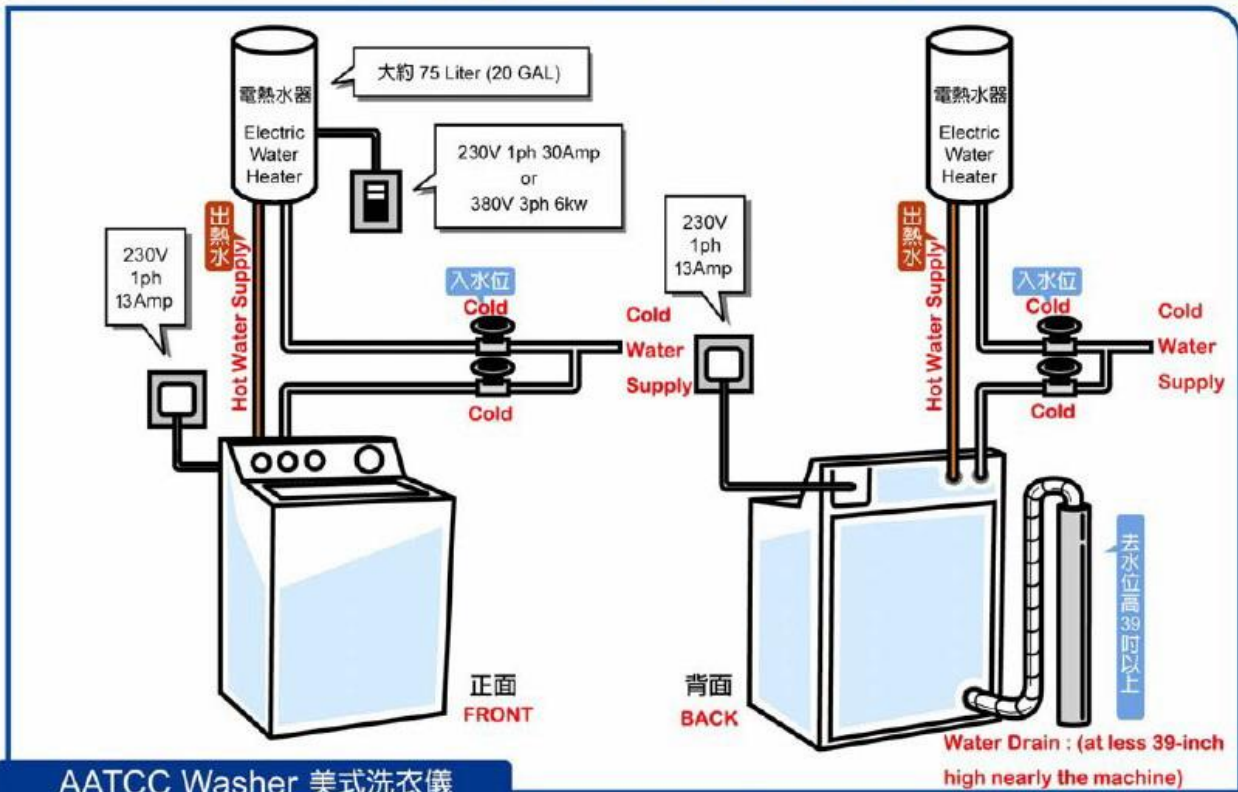

AATCC Washer 美式洗衣儀

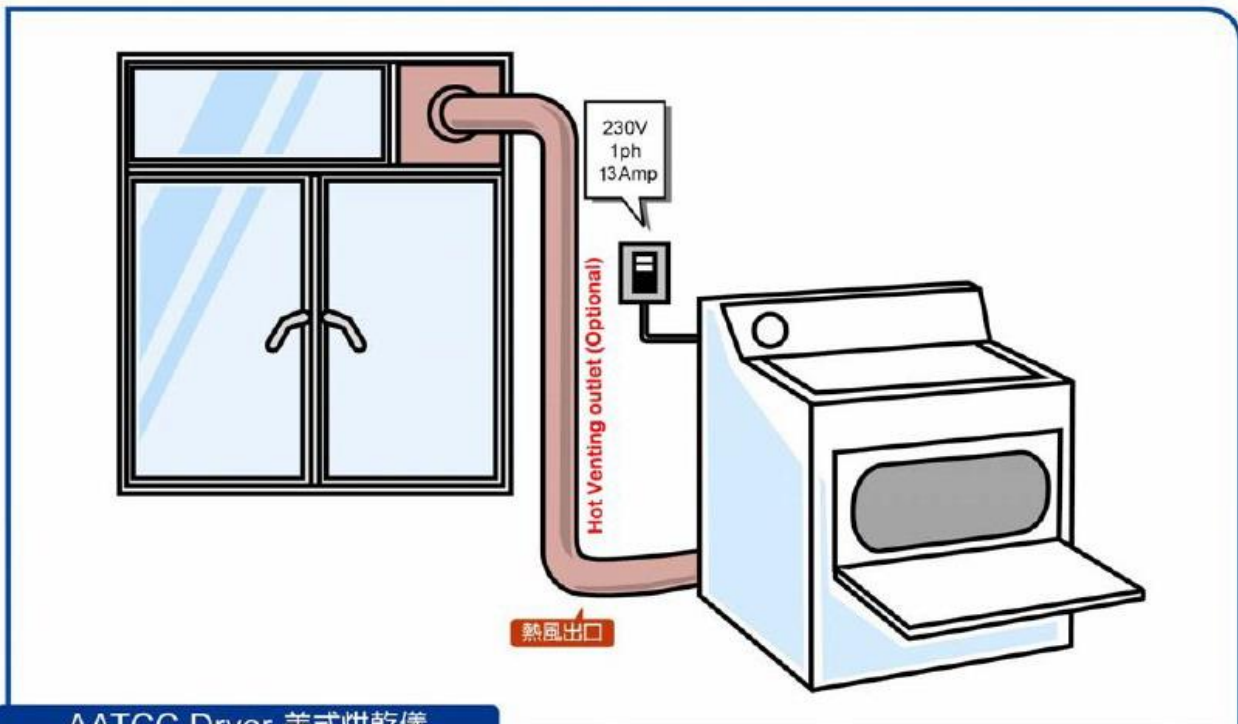

AATCC Dryer 美式烘乾儀

*詳細安裝方法請參閱說明書

Catalog

Installation Environment -----	3
Installation Steps -----	4
Installation Tools -----	5

Installation Environment

1. The washing machine is suitable for indoor work to avoid sunlight and rain.
2. The ground should be flat so that the washing machine operates smoothly without shaking.
3. **Electric:** The room should be equipped with corresponding power supply (220V) and power sockets, including two 13A porous sockets and British sockets. The sockets should be installed above the washing machine, about 1.2 meters above the ground, for ease of use. (As shown in Figure 1)

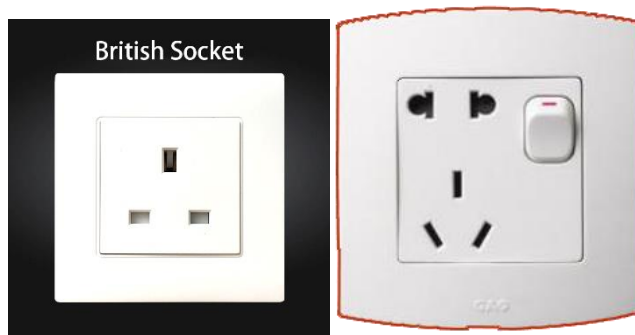


Figure 1

4. **Water:** The washing machine has two inlet pipes (cold water pipe and hot water pipe), so it needs to be equipped with a cold water supply pipe and a hot water supply pipe. In addition, a water storage electric water heater needs to be installed to supply hot water. The capacity of the electric water heater should be $\geq 80\text{L}$, and the water pressure of the cold and hot water should be $\geq 4\text{kg}$.
The two water inlet pipe joints of the washing machine are both 4-inch internal tooth joints, so the two joints of the water supply pipe that are connected to them must be 4-inch external tooth joints (if the water supply pipe is a 6-inch pipe, a 6-inch to 4-inch external tooth joint can also be used).



Figure 2



Figure 3

5. **Drainage:** When the washing machine is in operation, sewage needs to be discharged, so a drainage pipe for sewage should be installed. The diameter of the drainage pipe should be $\geq 50\text{mm}$, and the height of the drainage pipe should be basically the same as the height of the washing machine (the pipe mouth is more suitable to be 80-100cm above the ground) (Figure 4)



Figure 4



Figure 5

6. Overall installation



7. Overall structure diagram after installation



Installation Steps

1. Place the washing machine smoothly on the floor and adjust the height to the same level (the feet are adjustable).
2. Open the washing machine door and remove the installation accessories from the drum. (As shown in the figure below)



3. Connect one end of the drainage pipe to the washing machine drainage outlet, and insert the other end into the drainage pipe.



4. Fix the two water inlet pipes to the two water inlets of the washing machine, and connect the other end to the cold and hot water supply pipes respectively (there are cold and hot water signs at the water inlet of the washing machine).



5. Plug in the power and open the water supply valve to test the machine.

P5

Installation Tools

1. Adjustable wrench for tightening the water inlet pipe and adjusting the washing machine foot mat.

