


AATCC Washing Machine

AATCC official website recommendations

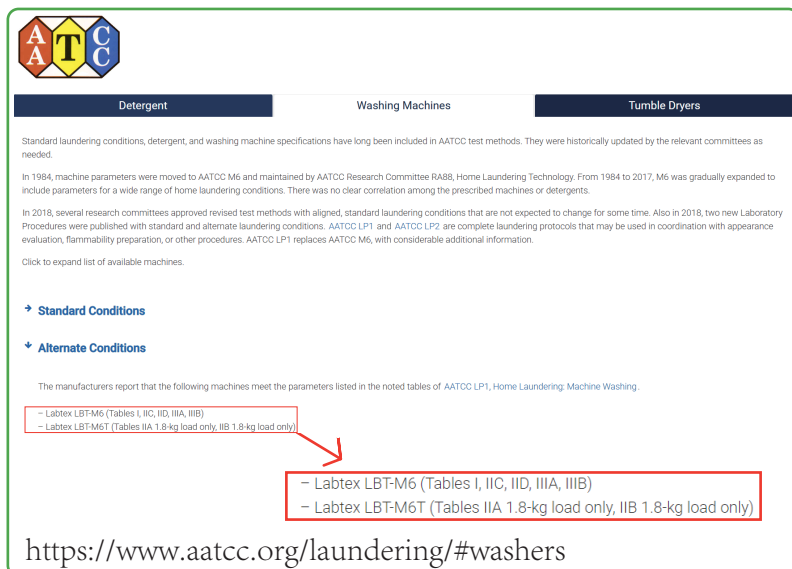

The screenshot shows the AATCC website's 'Washing Machines' section. It includes a navigation bar with 'Detergent', 'Washing Machines', and 'Tumble Dryers'. The 'Washing Machines' section contains text about standard laundering conditions and a list of recommended machines. A red box highlights the following list:

- Labtex LBT-M6 (Tables I, IIC, IID, IIIA, IIIB)
- Labtex LBT-M6T (Tables IIA 1.8-kg load only, IIB 1.8-kg load only)

A red arrow points from the second item to a larger red box containing the following list:

- Labtex LBT-M6 (Tables I, IIC, IID, IIIA, IIIB)
- Labtex LBT-M6T (Tables IIA 1.8-kg load only, IIB 1.8-kg load only)

The URL <https://www.aatcc.org/laundrying/#washers> is displayed at the bottom.



Model: LBT-M6T

Meet Standard:

AATCC TM88B、TM88C、TM124、TM135、TM143、AATCC 150-2018t、
AATCC 179-2019、AATCC LP1-2021、ISO 6330:2021(E)

Washing Program:

Table I (Normal.Delicate.Permanent press)
Table IIA (Normal.Delicate.Permanent press)
Table IIB (Normal.Delicate.Permanent press)
Table IIC (Normal.Delicate.Permanent Press)
Table IID (Normal.Delicate)
Table IIIA (Normal.Delicate)
Table IIIB (Normal.Delicate)
Drain & Spin、Rinse & Spin、Customized

Customer-Customized Program:

Nike 119 (Nike Apparel Wash Protocol)
Nike 100 (Nike Apparel wash Protocol)

Technical Parameter:

Water inlet temperature control: 25-60°C (washing process); tap water (rinsing process)
Laundry capacity: 10.5 kg
Power supply: 220V/50Hz or 120V/60Hz
Power: 1kW
Packaging dimensions: 820mm × 810mm × 1330mm
Packaging weight: 133 kg
(This machine is not equipped with a heater; hot water supply is provided by an external water heater)

140-0003-0 Washing Program----AATCC LP1-2021 Table IIA
Washing Program Parameters
(Traditional Top-loading Washing Machines 2000-2008)

Cycle	Normal	Permanent Press	Delicate
Water Level Medium	18 ± 1gal	18 ± 1gal	18 ± 1gal
Agitation Speed	179 ± 2spm	179 ± 2spm	119 ± 2spm
Stroke Length	Up to 90°	Up to 90°	Up to 90°
Washing Time	12 ± 1min	10 ± 1min	8 ± 1min
Final Spin Speed	645 ± 15rpm	430 ± 15rpm	430 ± 15rpm
Final Spin Time	6 ± 1min	4 ± 1min	6 ± 1min

140-0004-0 Washing Program----AATCC LP1-2021 Table IIB
Washing Program Parameters
(Traditional Top-loading Washing Machines 2009-2010)

Cycle	Normal	Permanent Press	Delicate
Water Level Medium	18 ± 1gal	18 ± 1gal	18 ± 1gal
Agitation Speed	179/119 ± 2spm	179/119 ± 2spm	119 ± 2spm
Stroke Length	Up to 90°	Up to 90°	Up to 90°
Washing Time	12 ± 1min	9 ± 1min	6 ± 1min
Final Spin Speed	645 ± 15rpm	430 ± 15rpm	430 ± 15rpm
Final Spin Time	6 ± 1min	4 ± 1min	3 ± 1min

**140-0002-0 Washing Program----AATCC LP1-2021 Table I
AATCC 88B、88C-2018t Table I
AATCC 124、135、143、150-2018t Table I
AATCC 179-2019 Table I
ISO 6330:2021(E) Table C.1
Washing Program Parameters**

Cycle	Normal	Permanent Press	Delicate
Water Level Medium	19 ± 1gal	19 ± 1gal	19 ± 1gal
Agitation Speed	86 ± 2spm	86 ± 2spm	27 ± 2spm
Stroke Length	Up to 90°	Up to 90°	Up to 90°
Washing Time	16 ± 1min	12 ± 1min	8.5 ± 1min
Final Spin Speed	660 ± 15rpm	500 ± 15rpm	500 ± 15rpm
Final Spin Time	5 ± 1min	5 ± 1min	5 ± 1min

**140-0005-0 Washing Program----AATCC LP1-2021 Table IIC
Washing Program Parameters
(Traditional Top-loading Washing Machines 2011-2012)**

Cycle	Normal	Permanent Press	Delicate
Water Level Medium	19 ± 1gal	19 ± 1gal	19 ± 1gal
Agitation Speed	86 ± 2spm	86 ± 2spm	27 ± 2spm
Washing Time	16 ± 1min	12 ± 1min	8.5 ± 1min
Final Spin Speed	660 ± 15rpm	500 ± 15rpm	500 ± 15rpm
Final Spin Time	5 ± 1min	5 ± 1min	5 ± 1min

140-0006-0 Washing Program----AATCC LP1-2021 Table IID
Washing Program Parameters
(Traditional Top-loading Washing Machines 2013-2017)

Cycle	Normal	Delicate
Water Level Medium	19 ± 2gal	19 ± 2gal
Agitation Speed	86 ± 5spm	27 ± 5spm
Washing Time	16 ± 2min	8.5 ± 2min
Final Spin Speed	660 ± 15rpm	500 ± 15rpm
Final Spin Time	5 - 10min	5 - 10min
Number of Rinses	1	1

140-0007-0 Washing Program----AATCC LP1-2021 Table IIIA
Washing Program Parameters
(High-efficiency Top-loading Washing Machines 2013-2017)

Cycle	Normal	Delicate
Water Level Medium	8 ± 2gal	15 ± 1gal
Agitation Speed	60 ± 5spm	75 ± 5spm
Washing Time	11 ± 2min	9 ± 2min
Final Spin Speed	770 ± 20rpm	500 ± 20rpm
Final Spin Time	5 - 18min	5 - 10min
Number of Rinses	1	1

**140-0008-0 Washing Program----AATCC LP1-2021 Table IIIB
Washing Program Parameters
(High-efficiency Top-loading Washing Machines,Agitator style,2018)**

Cycle	Normal	Delicate
Water Level Medium	18 ± 2gal	18 ± 2gal
Agitation Speed	60 ± 5spm	70 ± 5spm
Washing Time	14 ± 2min	8 ± 2min
Final Spin Speed	660 ± 20rpm	660 ± 20rpm
Final Spin Time	5 - 10min	1 - 6min
Number of Rinses	1	1

Optional:Washing machine installation (water source) accessories

- 1.Pre filter:filters impurities from the water source
- 2.Pressure gauge:monitoring water pressure



Configuration:

- Pre-filter 2 sets
- Pressure gauge 2 sets
- Internal and external 4-point 3-way connector 2 sets
- 4-point sealing gasket 6 pieces